


Description

SAP0525 is an audio power transistor, silicon PNP epitaxial type. With superior gain linearity and safe operating area performance, the transistors (SAN0525 together with SAP0525) are ideal for high fidelity audio amplifier output stages and other linear applications.

- Note: Using continuously under heavy loads (e.g. the application of high temperature/ current/ voltage and the significant change in temperature, etc.) may cause this product to decrease in the reliability significantly even if the operating conditions (e.g. operating temperature/ current/ voltage, etc.) are within the absolute maximum ratings.

Features and Applications


- Large collector current: $I_c=16A$
- High collector-emitter voltage: $V_{CEO} \geq 250V$
- Wide security workspace: $3.2A/80V@1\text{ Second}$
- Excellent frequency characteristic: $f_T > 20MHz$
- Suitable for final output of high fidelity audio amplifiers above 100W



12 200 210 210

Applications

- Power Amplifier
- Driver Stage Amplifier



Device Information

Part Number	Marking Code	Package	Packing
SAP0525	SAP0525	TO-264	

Absolute Maximum Ratings($T_c=25^{\circ}\text{C}$)





Characteristics	Symbol	Rating	Unit
Collector-base voltage	V_{CBO}	-330	V
Collector-emitter voltage	V_{CEO}	-250	V
Emitter-base voltage	V_{EBO}	-5	V
Collector current	I_C	-16	A
Base current	I_B	-5	A
Collector power dissipation($T_c=25^{\circ}\text{C}$)	P_C	250	W
Junction temperature	T_j	10	$^{\circ}\text{C}$
Storage temperature range	T_{STG}	-55~150	$^{\circ}\text{C}$

Electrical Characteristics ($T_c=25^{\circ}\text{C}$)

Characteristics	Symbol	Test Condition	Min	Typ	Max	Unit
Collector-Base Cut-off Current	I_{CBO}	$V_{CB}=250\text{V}, I_E=0$			-5.0	μA
Emitter-Base Cut-off Current	I_{EBO}	$V_{EB}=5\text{V}, I_C=0$			-5.0	μA
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C=50\text{mA}, I_B=0$	-250	300		V
DC current gain	h_{FE}	$I_C=1\text{A}; V_{CE}=5\text{V}$	75		150	
	$h_{FE(2)}$	$V_{CE}=5\text{V}; I_C=8\text{A};$	25		100	
Collector-emitter saturation voltage	V_{CEsat}	$I_C=8\text{A}; I_B=0.8\text{A}$			-1.4	V
Base-emitter voltage	V_{BE}	$V_{CE}=5\text{V}; I_C=8\text{A}$			-2.2	V
Transition frequency	f_T	$V_{CE}=5\text{V}; I_C=1\text{A}$	4			MHz


Symbol	Paramter	Typ	Units
$R_{\theta JC}$	Junction-to-Case	0.35	$^{\circ}\text{C}/\text{W}$

Characteristics Curves

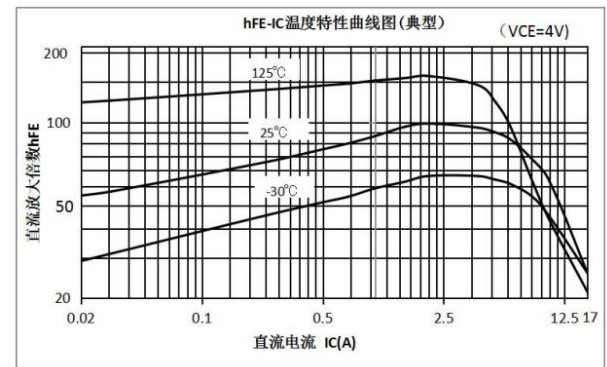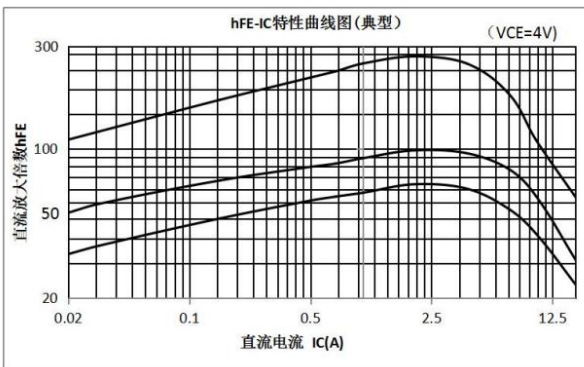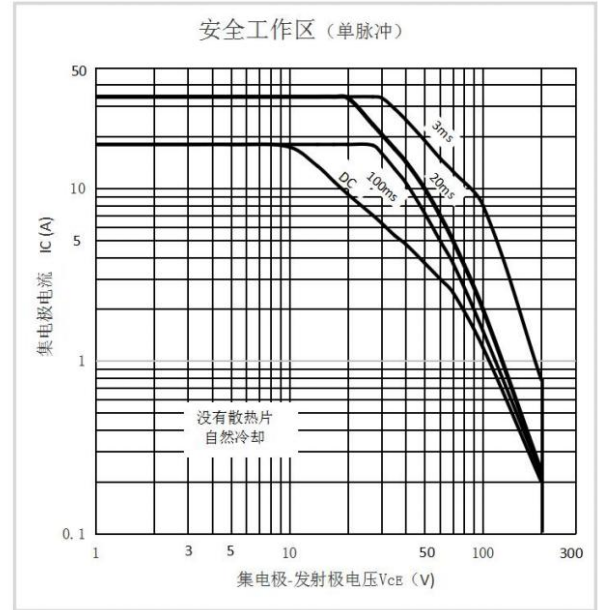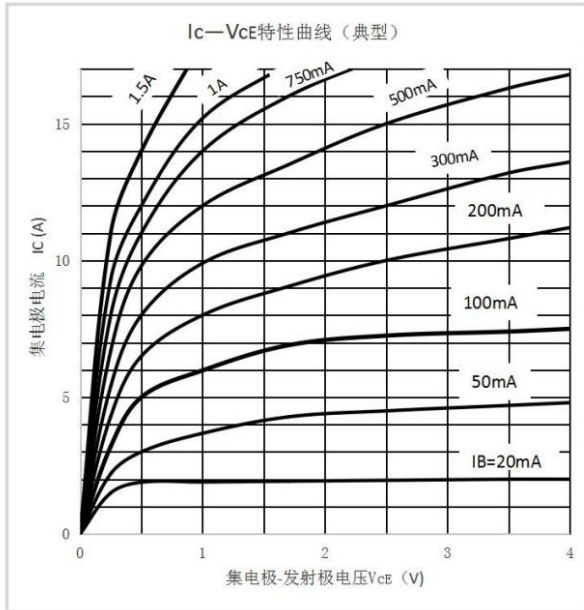

Package Information

TO-264

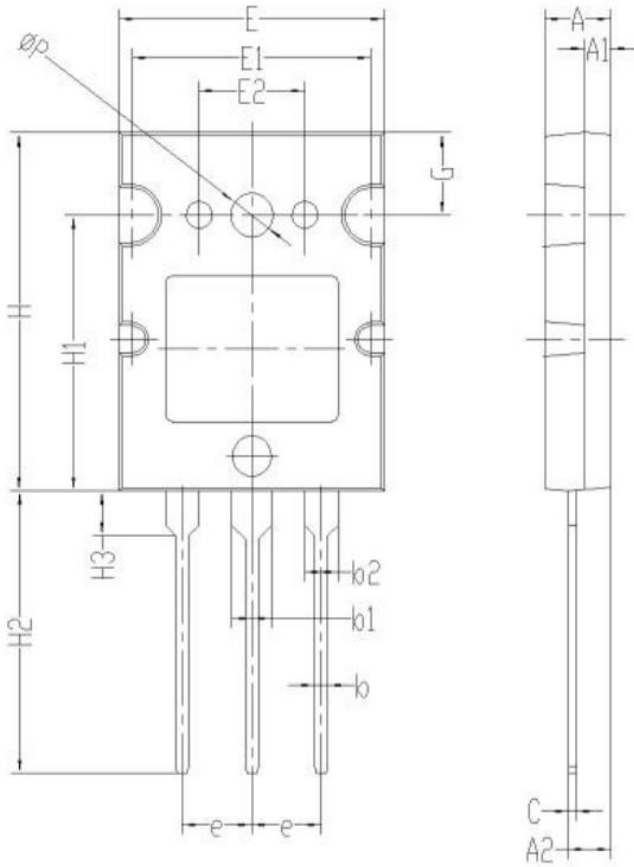

Symbol	Dimensions(millimeters)	
	Min.	Max.
A	4.80	5.20
A1	1.80	2.20
A2	3.00	3.40
b	0.80	1.20
b1	2.80	3.20
b2	2.30	2.70
c	0.40	0.80
e	5.25	5.65
E	19.8	20.2
E1	17.8	18.2
E2	7.8	8.2
H	25.8	26.2
H1	19.8	20.2
H2	20.0	21.0
H3	3.05	3.45
G	5.80	6.20
ΦP	3.10	3.50
J	4.80	5.20
K	1.80	2.20

Disclaimer

The content specified herein is for the purpose of introducing SET's products (hereinafter "Products"). The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. Examples of application circuits, circuit constants and any other information contained herein illustrate the standard usage and operations of the Products. The peripheral conditions must be taken into account when designing circuits for mass production.

SET does not assume any liability for infringement of patents, copyrights, or other intellectual property rights of third parties by or arising from the use of the Products or technical information described in this document.

The Products are not designed or manufactured to be used with any equipment, device or system which requires an extremely high level of reliability the failure or malfunction of which may result in a direct threat to human life or create a risk of human injury (such as a medical instrument, transportation equipment, aerospace machinery, nuclear-reactor controller, fuel-controller or other safety device). SET shall bear no responsibility in any way for use of any of the Products for the above special purposes.

Although SET endeavors to improve the quality and reliability of its products, semiconductor products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Please be sure to implement safety measures to guard them against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a SET product.

The content specified herein is subject to change for improvement without notice. When using a SET product, be sure to obtain the latest specifications.